


SERIE EUROPEA ISO 606 - DIN 8187
EUROPEAN STANDARD ISO 606 - DIN 8187

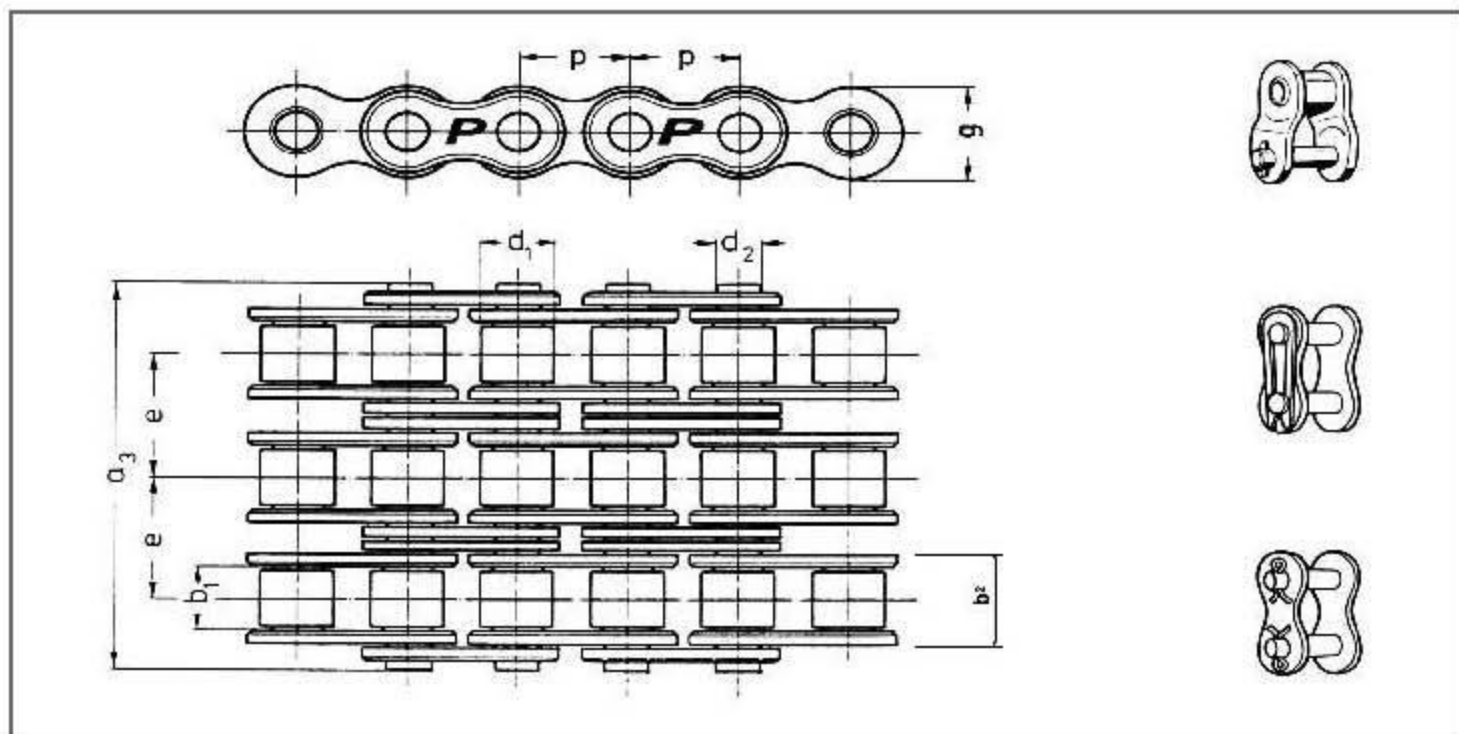

TRIPLA - TRIPLEX

ISO Nr.	Tipo Type	Passo mm	b ₁ min mm	d ₁ max mm	d ₂ max mm	b ₂ max mm	g max mm	e mm	a ₁ max mm	f min kN	Peso Weight Kg/m.	€		
												CATENA METER	GIUNTO PZ.	FALSA MAGLIA PZ.
06B-3	3/8" x 7/32"	9,525	5,72	6,35	3,28	8,53	8,26	10,24	34,0	2490	1,20			
08B-3	1/2" x 5/16"	12,7	7,75	8,51	4,45	11,30	11,81	13,92	44,9	4450	2,00			
10B-3	5/8" x 3/8"	15,875	9,65	10,16	5,08	13,23	14,73	16,59	52,8	6670	2,80			
12B-3	3/4" x 7/16"	19,05	11,68	12,07	5,72	15,62	16,13	19,46	61,7	8670	3,80			
16B-3	1" x 17,02	25,4	17,02	15,88	8,28	25,40	21,08	31,88	99,9	16000	8,00			
20B-3	1 1/4" x 3/4"	31,75	19,56	19,05	10,19	29,00	26,42	36,45	116,1	25000	11,0			
24B-3	1 1/2" x 1"	38,1	25,40	25,40	14,63	37,90	33,40	48,36	150,2	42500	21,0			
28B-3	1 3/4" x 1 1/4"	44,45	30,99	27,94	15,90	45,50	37,08	59,56	184,3	53000	25,0			
32B-3	2" x 1 1/4"	50,8	30,99	29,21	17,81	46,50	42,29	58,55	184,5	67000	32,0			

f = Carico di rottura minimo
f = *breaking load minimum*